


SD-16E1P



↓ Features

- ▷ EX-SDI 2.1 DVR, 16 CH (HD-SDI Compatible)
- ▷ **2K (4M) Video more than 400m over coaxial**
- ▷ PoC (Power over Coaxial) and UCC
- ▷ **240fps@2560x1440 (4MP)**
- ▷ HDMI, VGA, SPOT Video Output
- ▷ Sensor 4 Input, Alarm 1 Output
- ▷ DDNS support, Mobile App. (Android, iPhone), CMS

↓ Dimension

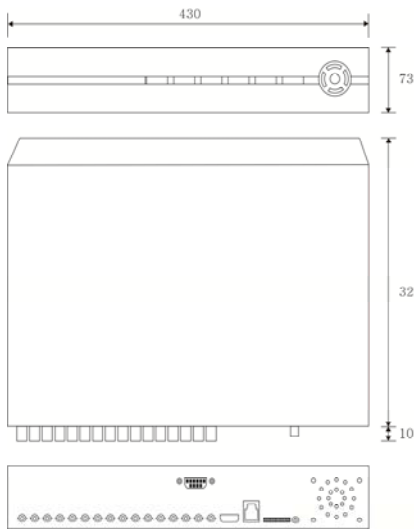

↓ Specifications

Classification		EX-SDI 2.1 DVR	
		SD-16E1P (16CH)	
Operating System		Embedded Linux	
DVR Mode		EX-SDI 2.1 (HD-SDI compatible)	
Video	Camera Input	16	
	Output	HDMI / VGA / SPOT	
Audio	Audio Input	4 RCA	
	Output	1 RCA	
Sensor in / Alarm Out		4 / 1	
Operating System		Embedded Linux OS	
Display	Speed	480fps	
	Resolution(Pixel)	<b>Up to 4K</b>	
	Split Screen	1, 4, 6, 9, 13, 16	
Record	Compression	H.264	
	Resolution(Pixel)	<b>2560 x 1440p</b>	
	Picture Quality	4 Steps (Highest,High,Middle,Low)	
	Mode	Manual, Continuous, Motion, Sensor, Cont+Event, Motion+Sensor, Schedule1~4	
		<b>Max. Speed</b>	<b>240fps @ 2560x1440</b>
Playback	Split Screen	1, 4, 6, 9, 13, 16	
	Search Mode	Quick, Calendar, Bookmark, Event, USB	
	Speed	Normal, REW & FF(x1, x2, x4, x16, x32, x64, x128, x256), Frame to Frame, Pause	
Network	Network Interface	Ethernet (10/100/1G)	
	Protocol	TCP/IP, SMTP, HTTP, DHCP	
	Application	Windows 10 / 7 / 2000 / XP (PC Client System)	
	Web Browser	Internet Explorer 5.0 Higher (DVRs Contorl or Viewing)	
		Viewing	Appl. (iPhone, Android), Remote Client, CMS
Archive	Interface	USB 2.0 x 2 (Front, Rear)	
Control	Motion Detection	Each Control / Channel (Sensitivity : 1~15 Steps) Area : Programmable motion detection area for each camera individually	
	Controller	Mouse (Option : IR Remote controller)	
Others	Storage	2 x HDD	
	Power Source	PoC 48V 4.20A	
	Operating Temperature	5 ~ 40°C (41 ~ 104F)	
	Relative Humidity	>95%	
Dimension (WxDxH ; mm)		430 x 325 x 73	

↓ Viewer

