

어둠 속의 강력한 감시자! 초저조도 CCTV 카메라



NS[★] LIGHT SAT SERIES

저조도에서 칼라 영상으로 선명하게
감시하는 카메라

- ▶ 초저조도 센서로 어둠속에서도 선명한 화질 구현!
- ▶ 자동추적(Auto Tracking)으로 목표물은 좀 더 빠르게 캐치!
- ▶ 사생활(Privacy) 보호 기능!
- ▶ EX-SDI PoC 기술로 시공은 더욱 심플하게!



NS[★] LIGHT


야간에도 초저조도 센서 및 렌즈를 사용하여 선명한 컬러 영상 구현

일반 센서 및 렌즈를 적용한 야간 화질



- 일반 IR 카메라 영상

S-LIGHT 야간 화질(초저조도 센서 및 렌즈 적용)

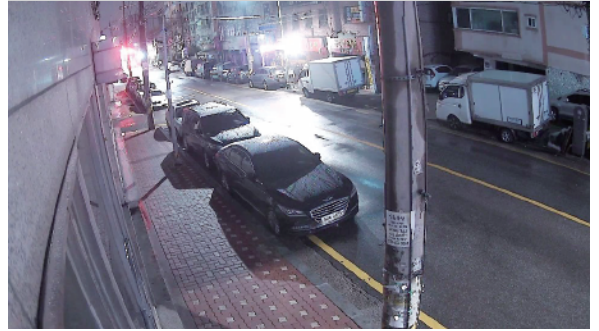


- 가로등 불빛만 있어도 24시간 선명한 영상 제공


PoC (Power Over Coax) - EX-SDI

- 하나의 동축선으로 영상, 전원, Data를 모두 전송.
- 카메라의 전원은 영상 전송용 동축선을 통하여 공급하여 카메라 전원선을 별도로 시공할 필요가 없음.
- 카메라의 설정을 위한 Data설정 신호도 영상 전송용 동축선을 통하여 가능.

기존의 카메라와 녹화기 사이의 연결




카메라와 녹화기 사이의 PoC 연결



사생활 보호 기능

- 영상화면의 일정 영역을 사생활 보호 영역으로 설정할 수 있음.
- 회사 기밀 등 노출에 대해 일정 영역 외부 유출을 방지할 수 있음.

영역 사생활 보호

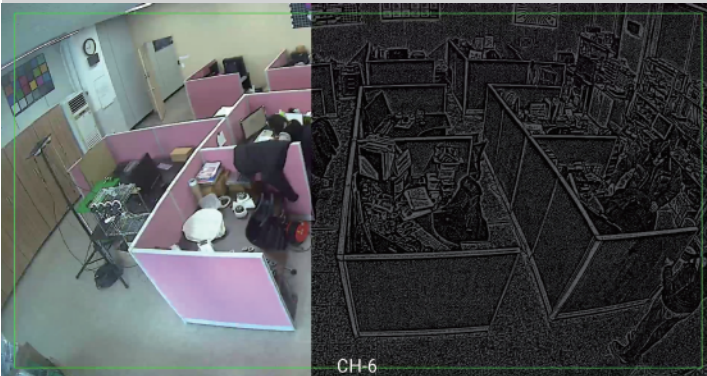

- 영상화면에서 지정한 부분만 사생활 보호 영역으로 설정할 수 있음.
- 근무자의 사생활 보호 등 적재 적소에 영역을 지정할 수 있음.

지정 부분 사생활 보호 (4개 까지 가능.)



SMART AUTO TRACKING (SAT)

- 움직이는 물체를 추적해 따라가며 확대시켜주는 기능.
- 2배 디지털 줌으로 확대되어 자동으로 추적함.



2M EX-SDI SAT CAMERAs (Auto Focus Lens)

WDR | Auto Focus | IP 66



SNED-B6625AIR

- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ EX-SDI
- ⊙ 2.8-12mm Motorized (Auto Focus) F1.4 Lens
- ⊙ 2.7-10mm Motorized (Auto Focus) F1.2 Lens (Option)
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 48V PoC (Option)
- ⊙ 32 IR LEDs
- ⊙ Camera Operating Indicate LED
(Normal: Green, Low Power: Red, Power Down: Off)
- ⊙ 1point joint : 3axis adjustment

WDR | Auto Focus



SNED-D1022AIR

- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ EX-SDI
- ⊙ 2.8-12mm Motorized (Auto Focus) F1.4 Lens
- ⊙ 2.7-10mm Motorized (Auto Focus) F1.2 Lens (Option)
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise ReductiF
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 48V PoC (Option)
- ⊙ 30 IR LEDs
- ⊙ Camera Operating Indicate LED
(Normal: Green, Low Power: Red, Power Down: Off)

WDR | Auto Focus | IP 66



*Bracket (Option)

SNED-V1024AIR

- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ EX-SDI
- ⊙ 2.8-12mm Motorized (Auto Focus) F1.4 Lens
- ⊙ 2.7-10mm Motorized (Auto Focus) F1.2 Lens (Option)
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 48V PoC (Option)
- ⊙ 31 IR LEDs
- ⊙ Camera Operating Indicate LED
(Normal: Green, Low Power: Red, Power Down: Off)

2M EX-SDI SAT CAMERA (Varifocal Lens)

WDR | IP 66



*Bracket (Option)

SNED-V1023VIR

- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ EX-SDI
- ⊙ 2.8-12mm DC-IRIS Varifocal Lens
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 48V PoC (Option)
- ⊙ 31 IR LEDs
- ⊙ Camera Operating Indicate LED
(Normal: Green, Low Power: Red, Power Down: Off)

2M EX-SDI SAT CAMERAs (Fixed Lens)

WDR | IP 66



SNED-B6621F

- ⊙ 24Hours Color Video Surveillance
- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ EX-SDI
- ⊙ 4.0mm Ultra Bright Lens
(Option: 6.0mm Ultra Bright Lens)
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 48V PoC (Option)
- ⊙ 1point joint : 3axis adjustment

WDR | IP 66



SNED-B6621FIR

- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ EX-SDI
- ⊙ 3.6mm Fixed Lens
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 48V PoC (Option)
- ⊙ 45 IR LEDs
- ⊙ Camera Operating Indicate LED
(Normal: Green, Low Power: Red, Power Down: Off)
- ⊙ 1point joint : 3axis adjustment

WDR



SNED-D8125FIR

- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ EX-SDI
- ⊙ 3.6mm Fixed Lens
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 48V PoC (Option)
- ⊙ 23 IR LEDs
- ⊙ Camera Operating Indicate LED
(Normal: Green, Low Power: Red, Power Down: Off)

2M ANALOG HD SAT CAMERA (Fixed Lens)

WDR | IP 66



SNAH-B6621F

- ⊙ 24Hours Color Video Surveillance
- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ Analog HD
- ⊙ 4.0mm Ultra Bright Lens
(Option: 6.0mm Ultra Bright Lens)
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 1point joint : 3axis adjustment

2M ANALOG HD SAT CAMERA (Varifocal Lens)

WDR | IP 66



SNAH-V1021VIR

- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ Analog HD
- ⊙ 2.8-12mm DC-IRIS Varifocal Lens
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 31 IR LEDs
- ⊙ Camera Operating Indicate LED
(Normal: Green, Low Power: Red, Power Down: Off)

2M ANALOG HD SAT CAMERAS (Auto Focus Lens)

WDR | Auto Focus | IP 66



SNAH-B6625A

- ⊙ 24Hours Color Video Surveillance
- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ Analog HD
- ⊙ 2.8-12mm Motorized (Auto Focus) F1.4 Lens
- ⊙ 2.7-10mm Motorized (Auto Focus) F1.2 Lens (Option)
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 1point joint : 3axis adjustment

WDR | Auto Focus | IP 66



SNAH-V1022AIR

- ⊙ 2M CMOS Sensor (Starvis)
- ⊙ 1080P@30fps
- ⊙ Analog HD
- ⊙ 2.8-12mm Motorized (Auto Focus) F1.4 Lens
- ⊙ 2.7-10mm Motorized (Auto Focus) F1.2 Lens (Option)
- ⊙ Defog Function (Visibility Enhancement)
- ⊙ 3D Digital Noise Reduction
- ⊙ SAT (Smart Auto Tracking)
- ⊙ Image Security Masking
- ⊙ 31 IR LEDs
- ⊙ Camera Operating Indicate LED
(Normal: Green, Low Power: Red, Power Down: Off)